

NTG-1

Directional Condenser Microphone

RØDE
MICROPHONES


Features

- Broadcast sound quality
- Low noise circuitry
- Condenser transducer
- Rugged metal construction
- Two step High Pass Filter (Flat/80Hz)
- Low handling noise
- Low weight - 105g (3 oz.)
- Designed and manufactured in Australia
- Full 10 year warranty*


Specifications

Acoustic Principle	Line Gradient	Directional Pattern	Super-Cardioid
Frequency Range	20Hz ~ 20,000Hz (selectable HPF@80Hz)	Sensitivity	-36dB \pm 2dB re 1V/Pa @ 1kHz
Nominal Impedence	50 Ω	Equivalent Noise	18dBA SPL (A - weighted per IEC651)
Maximum Output	+6.9dBu (@ 1% THD into 1k Ω)	Dynamic Range	121dB (per IEC651)
Maximum SPL	139dB (@ 1kHz, 1% THD into 1k Ω load)	Signal/Noise	76dB SPL (A - weighted per IEC651)
Power Req.	48V Phantom Power	Dimensions	Length - 219mm Diameter - \varnothing 22mm
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)	Net Weight	105g

Frequency Response

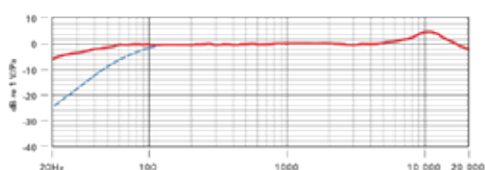

Frequency Response



Included Accessories

- WSVM Wind shield
- ZP1 Zip pouch
- RM5 Mic clip

